

**GOMAN**LIFT


**66KV Insulated Spider X23E/75'**

Fully hydraulic control available





### Standard Parameters

| Model                               | X23E                               | GXE74               |
|-------------------------------------|------------------------------------|---------------------|
| Max. work height                    | 23.00m                             | 75.5'               |
| Max. platform height                | 21.00m                             | 68.90'              |
| Working bucket type                 | One man bucket                     |                     |
| Load capacity                       | 160kg                              | 352lb               |
| Lateral Outreach                    | 10.1m                              | 33'                 |
| Turntable rotation                  | 360° non continuous                |                     |
| Size of working bucket              | 0.7*0.62*1.1m                      | 27.5" x 24.4" x 43" |
| Overall stowed length               | 7.46m                              | 293.7"              |
| Overall stowed width                | 0.89m                              | 35"                 |
| Overall stowed height               | 1.99m                              | 78.3"               |
| Outrigger support size (Wide leg)   | 7.16*3.04m                         | 281.8" x 119.6"     |
| Outrigger support size (Narrow leg) | 5.51*4.82m                         | 216.9" x 189.7"     |
| Total weight (approx.) full remote  | 4,100kgs                           | 9,030lbs            |
| HYDRAULIC CONTROL FOR BOOMS         | 4,458kgs                           | 9,828lbs            |
| Driving speed km/h                  | 0-2.0                              |                     |
| Max. approach angle                 | 19° with crawler extended          |                     |
| Max. work slope                     | 21°                                |                     |
| Max. climbing ability               | 23°                                |                     |
| Power                               | Diesel(Kubota D1105 18.2KW) + 110V |                     |

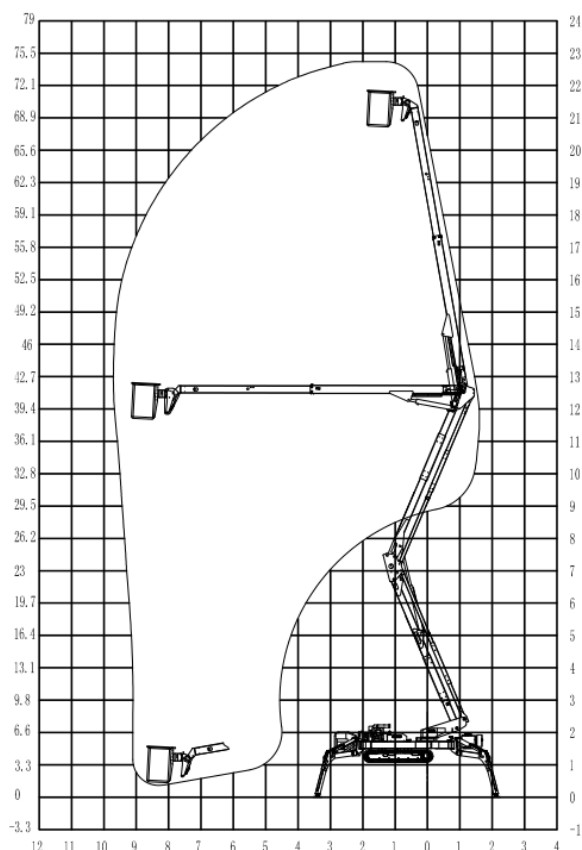

### Technical data

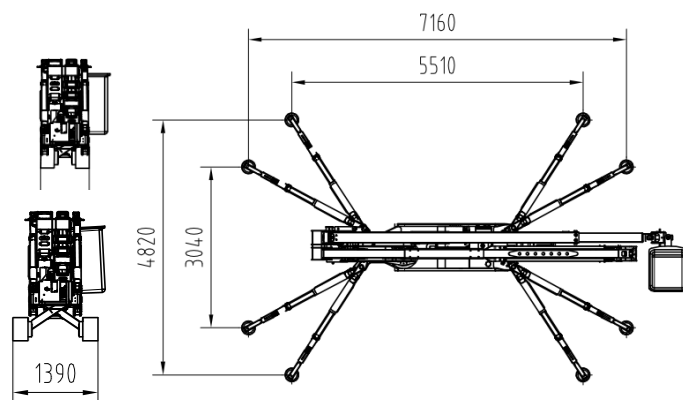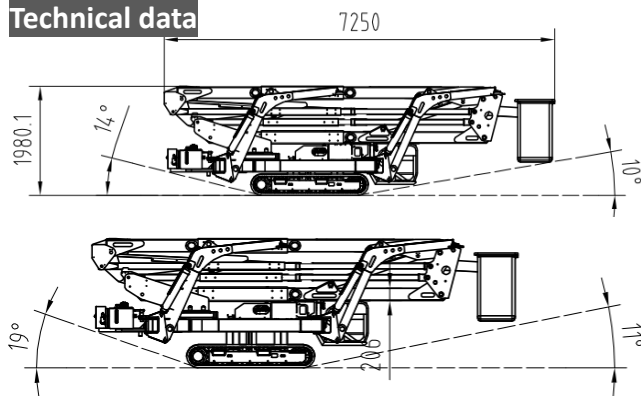

### Standard Features

FRP components from TX, USA

- Reliable quality and superior performance
- Radio control traction, outriggers and booms,
- German made HMI and PLC controller, stainless control box
- Automatic outrigger leveling and basket rotation
- Hydraulic adjustable crawlers for height and width
- Hydraulically arms and outrigger interlock
- Lubrication-free sleeve to reduce daily maintenance;
- Double insulation boom design ensures personnel safety;
- Reaches standards of ANSI92.2

