




Spider X16(GX53)

Standard Parameters

Model		X16	GX53
Max. work height	m	16.30	53'
Max. platform height	m	14.30	47'
Load capacity	kg	200	440lb
Lateral outreach	m	7.20	24'
Jib articulation		90°	
Turntable rotation		359°	
Size of platform		0.9*0.8m	36" x 31.5"
Overall stowed length		5.25m	207"
Overall stowed width		0.80m	36"
Overall stowed length		1.99m	78"
Total weight		1900kg	4189lb
Driving speed	km/h	0-2.2	
Work slope		20%	
Climbing ability		30%	
Standard: 2 power sources :		Vanguard 400 (14hp)	
		AC 220v 3hp/110 V1.5hp US	
optional for emergency purpose		Lithium battery 12V 100Ah	


*We keep the right to alternate.

Technical data

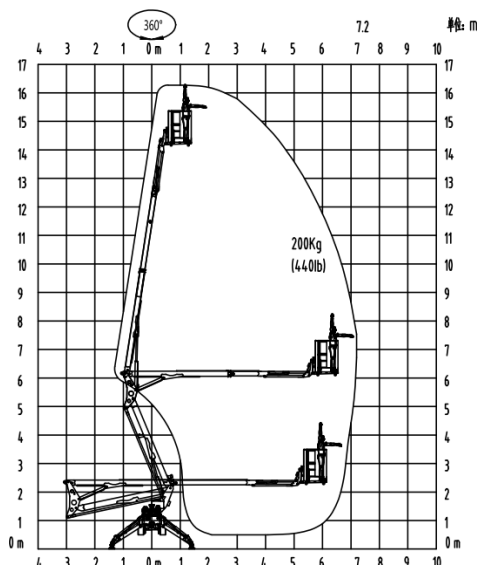

Standard Features

- Compact design, AC 16A outlet in the basket
- German made HMI and PLC controller, stainless control box
- cable control, integrated radio function for free
- Self-leveling basket, and interchangeable with hydraulic winch or other hydraulic tools as option
- Automatic outrigger leveling and basket rotation
- hydraulic adjustable crawlers for height and width
- Hydraulically arms and outrigger interlock
- Weight dispersal low ground pressure
- Made of high tensile steel, hot dip galvanized boom available
- Reaches standards of ISO, CE and ANSI/CSA

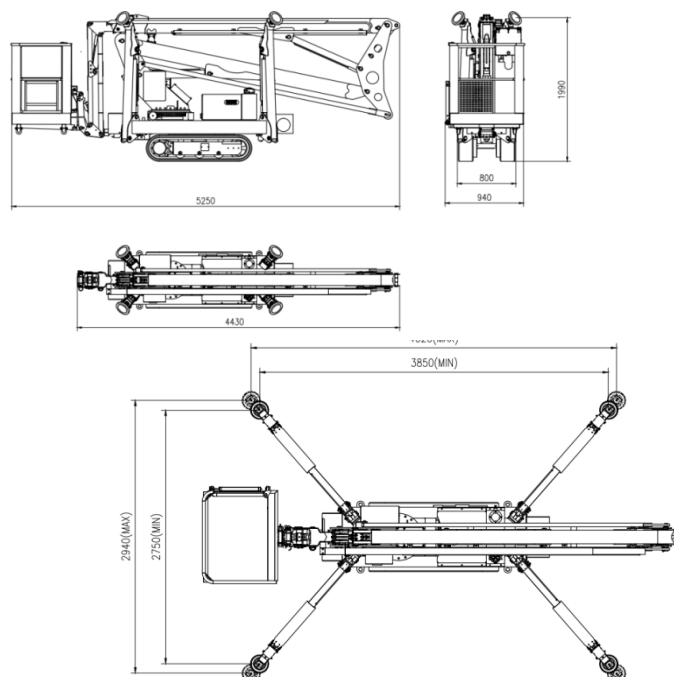

X16 (GX53) Price for Standard Parameters & Features

Optional

Diesel engine Kubota Z482	+ US\$5200	Lithium battery lowering system+	US\$1500
Lead-acid battery 48V 165Ah	+ US\$3100	2nd lithium battery power	+ US\$2600
Lithium battery 48v 250Ah	+ US\$5100	Hydraulic tool outlet	+ US\$480

Contact: Goman Lift Tel: 514 318 6826 gomanlift@outlook.com

Address: 5589 Ch Saint Francois, Saint Laurent, QC H4S 1W6