

GOMANLIFT

Spider X18




GX60



Standard Parameters

Model	X18	GX60
Max. work height	18.30m	60'
Max. platform height	16.30m	52'
Load capacity	200kg	440lb
Lateral Outreach	7.20m(8.30m 80kg)	24'/27'
Jib articulation	90° (120° optional)	
Turntable rotation	359°	
Size of platform	1.0*0.8m	39" x 31.5"
Overall length(*basket stowed side)	5.5m/5.0m*	18'/16.4'
Overall length (removed basket)	4.70m	15.4'
Overall width (removed basket)	0.80m	31"
Overall height	1.99m	78"
Total weight (alternate with options)	2200kg	4850lb
Driving speed km/h	0-2.5	
Max. work slope	20%	
Max. climbing ability	30%	
Standard 2 power sources: (3 rd power lithium battery optional)	Vanguad 400 (14hp)	
	AC 220v 3hp/110V1.5hp US	
Optional power: emergency lowering	Lithium battery 12V 100Ah	

Technical data

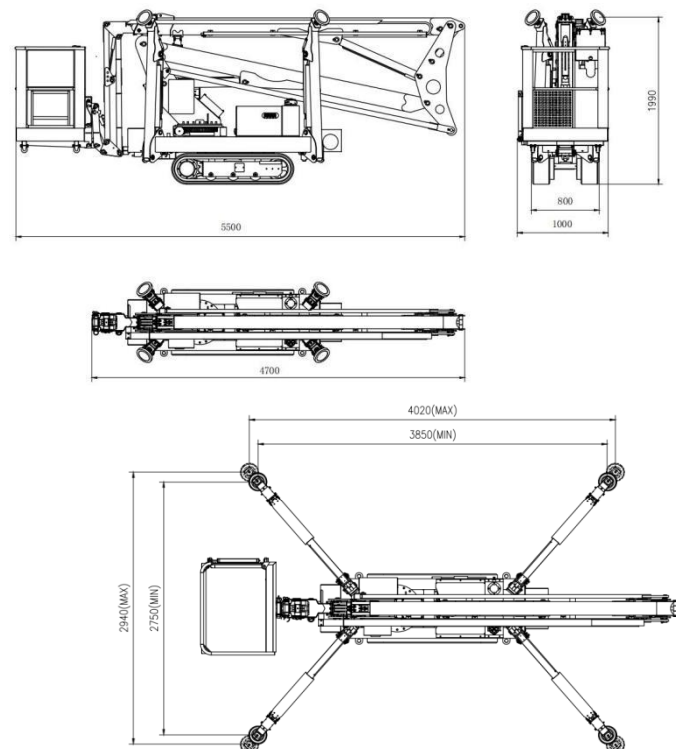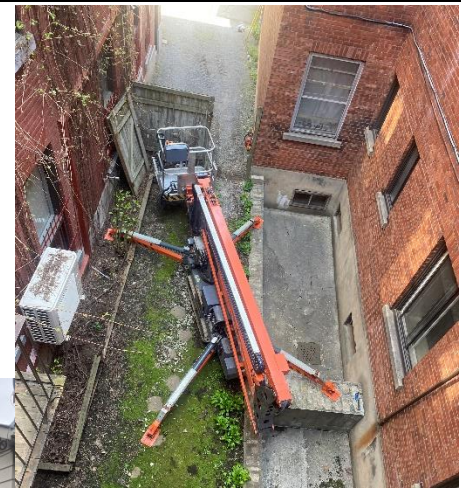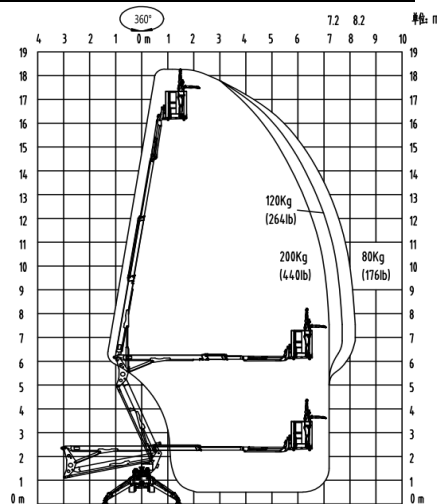

Standard Features

- Compact design, AC 16A outlet in the basket
- German made HMI and PLC controller, stainless control box
- cable control, integrated radio function for free
- Self-leveling basket, and interchangeable with hydraulic winch or other hydraulic tools as option
- Automatic outrigger leveling and basket rotation
- hydraulic adjustable crawlers for height and width
- Hydraulically arms and outrigger interlock
- Weight dispersal low ground pressure
- Made of high tensile steel, hot dip galvanized boom
- Reaches standards of ISO, CE and ANSI/CSA

X18 (GX60) Price for Standard Parameters & Features

Optional

Diesel engine Kubota Z482	Lithium battery lowering system
Lead-acid battery 48V 165Ah	2 nd lithium battery power 24V 200Ah
Lithium battery 48v 250Ah	Hydraulic tool outlet
One-man FRP basket	

Contact: Goman Lift Tel: 514 318 6826 gomanlift@outlook.com

Address: 5589 Ch. Saint Francois, Saint Laurent, QC H4S 1W6