

GOMANLIFT

Spider X21



GX71



Standard Parameters

Model	X21 <i>GX71</i>			
Max. work height	21.60m		71'	
Max. platform height	19.60m		64.3'	
Load capacity	200kg		500lb	
Lateral Outreach	200kg	440lb	80kg	176lb
	10.0m	32'	11.0m	36'
Jib articulation	120°			
Turntable rotation	360° (non-continuous)			
Basket rotation	+/-90°			
Size of platform	1.2*0.8*1.1m		47" x 31.5"x 43"	
Overall stowed length (*basket at side)	5.70m		18'8"	
Overall stowed length (without basket)	4.764m		15'8"	
Overall stowed width	0.88m		35"	
Overall stowed height	1.99m		78"	
Ground clearance when jacked up	760mm		30"	
*Total weight	2850kg		6283lb	
*Driving speed	km/h		0-2.5	
Max. work slope	20%			
*Max. climbing ability	30%			
Power source	Gas engine + 110V AC motor			

Technical data

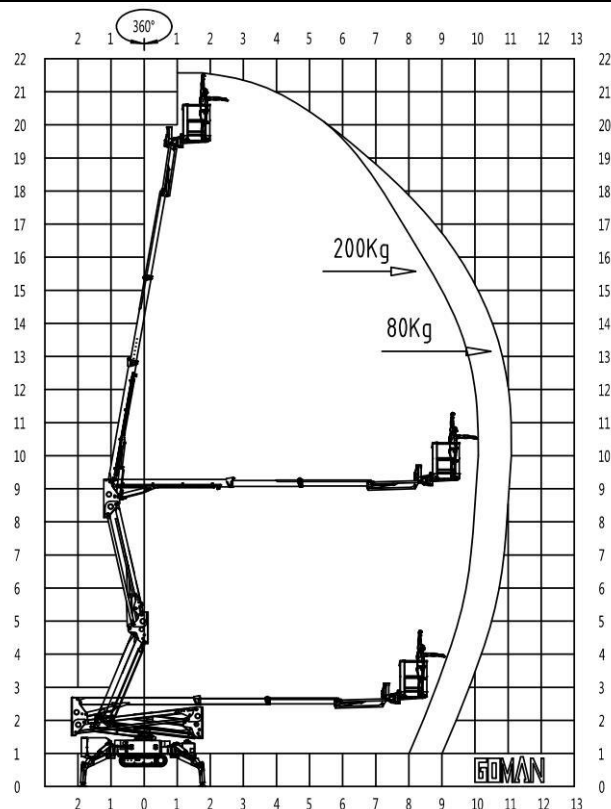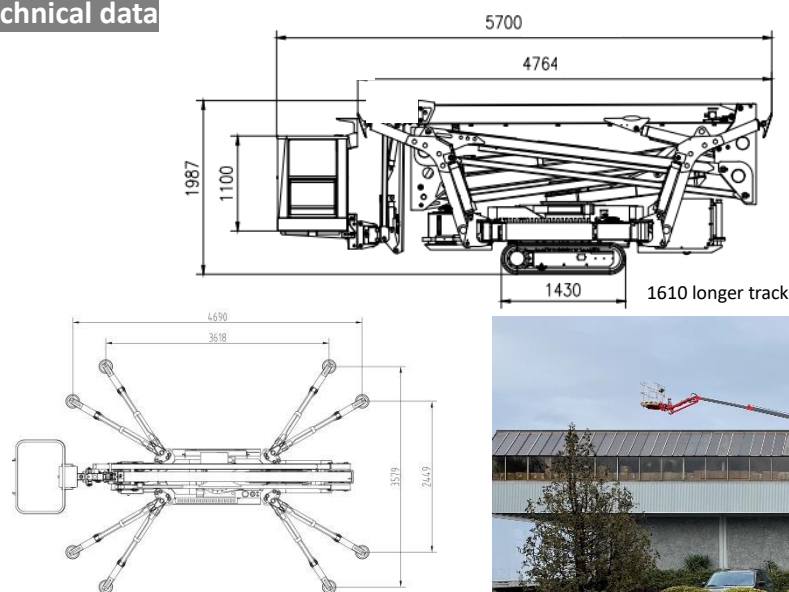

Standard Features

- Compact design, AC 16A outlet in the basket
- German made HMI and PLC controller, stainless control box
- cable control, integrated radio function for free
- Self-leveling basket, and interchangeable with hydraulic winch or other hydraulic tools as option
- Automatic outrigger leveling and 180° basket rotation
- hydraulic adjustable crawlers for height and width
- Hydraulically arms and outrigger interlock
- Weight dispersal low ground pressure; track width 200/230mm
- Made of high tensile steel, hot dip galvanized boom available
- Reaches standards of ISO, CE and ANSI/CSA

X21 (GX69) Price for Standard Parameters & Features, options

Optional

Diesel engine Kubota/Yanmar

Lithium battery lowering system

Lead-acid battery 48V 165Ah

2nd lithium power 24V200Ah

Lithium battery 48v 250Ah

Hydraulic tool outlet

One-man FRP basket

Contact: Goman Lift Tel: 514 318 6826 gomanlift@outlook.com

Address: 5589 Ch. Saint Francois, Saint Laurent, QC H4S 1W6