






Spider X24 (GX79)

Standard Parameters

Model	X24	GX79
Max. work height	24.00m	79'
Max. platform height	22.00m	72'
Load capacity	200kg	440lb
Lateral Outreach	11.00m	36"
Basket rotation		180°
Turntable rotation		360°
Size of platform	1.2*0.8m	47" x 32"
Overall stowed length	5.505m	217"
Overall stowed length(removed basket)	4.495m	177"
Overall stowed width(removed basket)	0.80m	31"
Overall stowed height	1.96m	77"
Total weight	3160kg	6967lb
Driving speed km/h		0-2.2
Max. work slope		20%
Max. climbing ability		30%
Dual power sources	Gas(23hp Vanguard) + AC (Diesel Kubota D722 as optional)	

Technical data

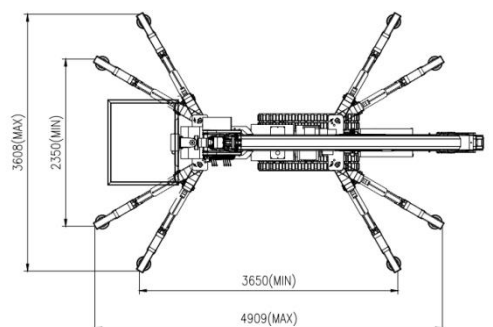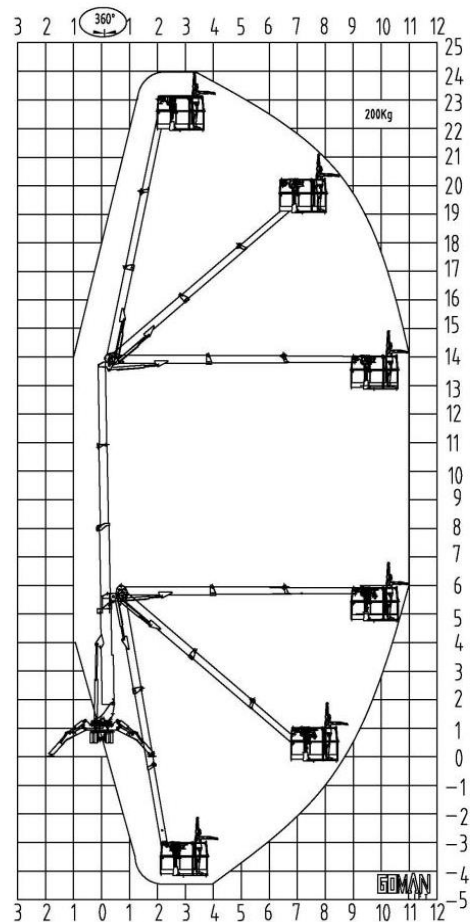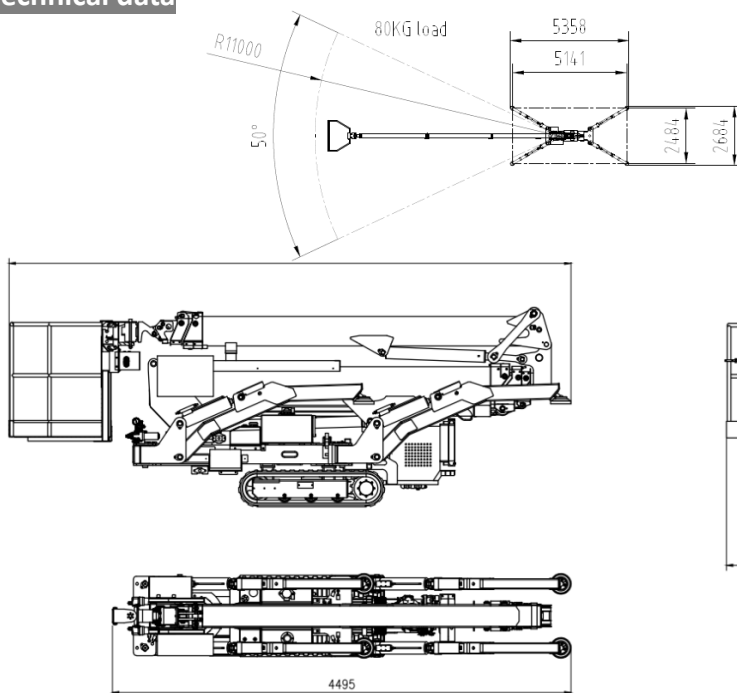

Standard Features

- Compact design with stainless control box
- HMI and redundant PLC controller made in Germany
- 230v(110) 15A outlet in the work platform
- Auto-leveling outriggers, with basket detachable
- Hydraulic extendable crawlers
- 360°non-continuous turntable rotation
- Hydraulically arms and outrigger interlocks
- Radio + cable control for all movements
- Made of extra high tensile SSAB steel
- Reach standards of ISO, CE and ANSI latest version

X24 (GX79) Standard Parameters &Features

Lead-acid battery 72V 200Ah

Lith battery auxiliary 48v200Ah

Lithium battery 72v 200Ah

Contact: Goman Lift Tel: 514 318 6826 gomanlift@outlook.com

Address: 5589 Ch. Saint Francois, Saint Laurent, QC H4S 1W6